


TRIAC Switches

TITLE: aqlogic_topoff	
Document Number:	REV:
Date: 5/4/09 6:23 PM	Sheet: 2/6

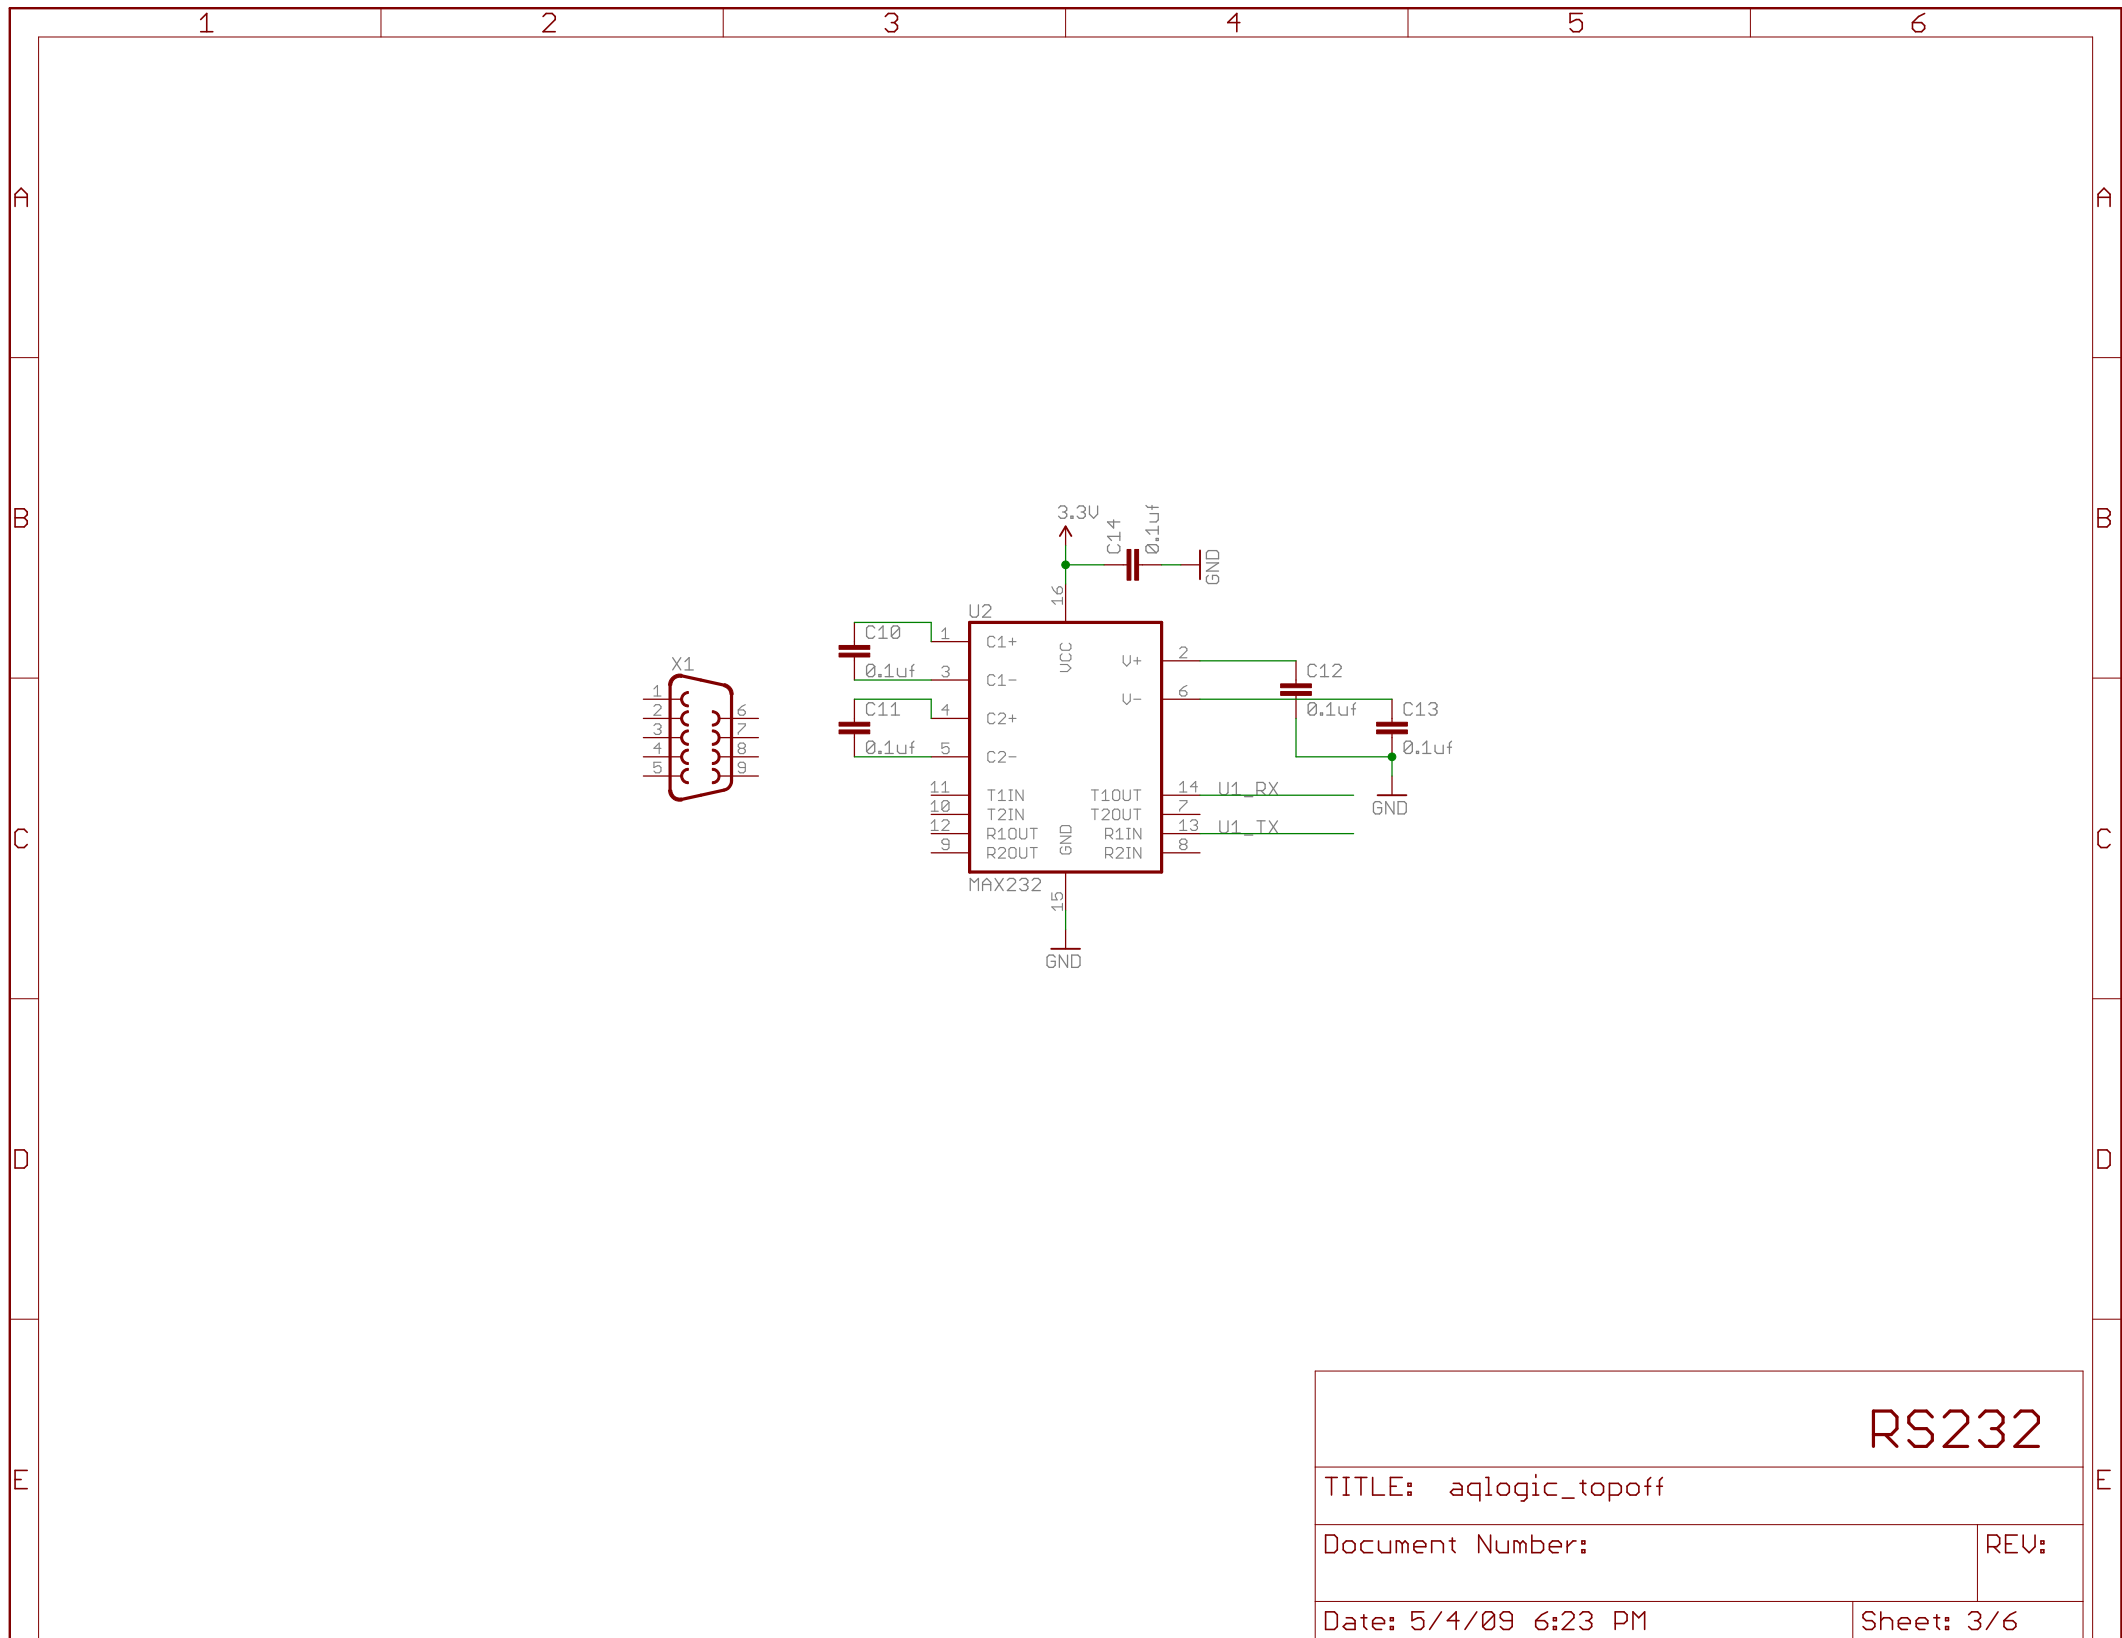

RS232


TITLE: aqlogic_topoff

Document Number:

REV:


Date: 5/4/09 6:23 PM

Sheet: 3/6

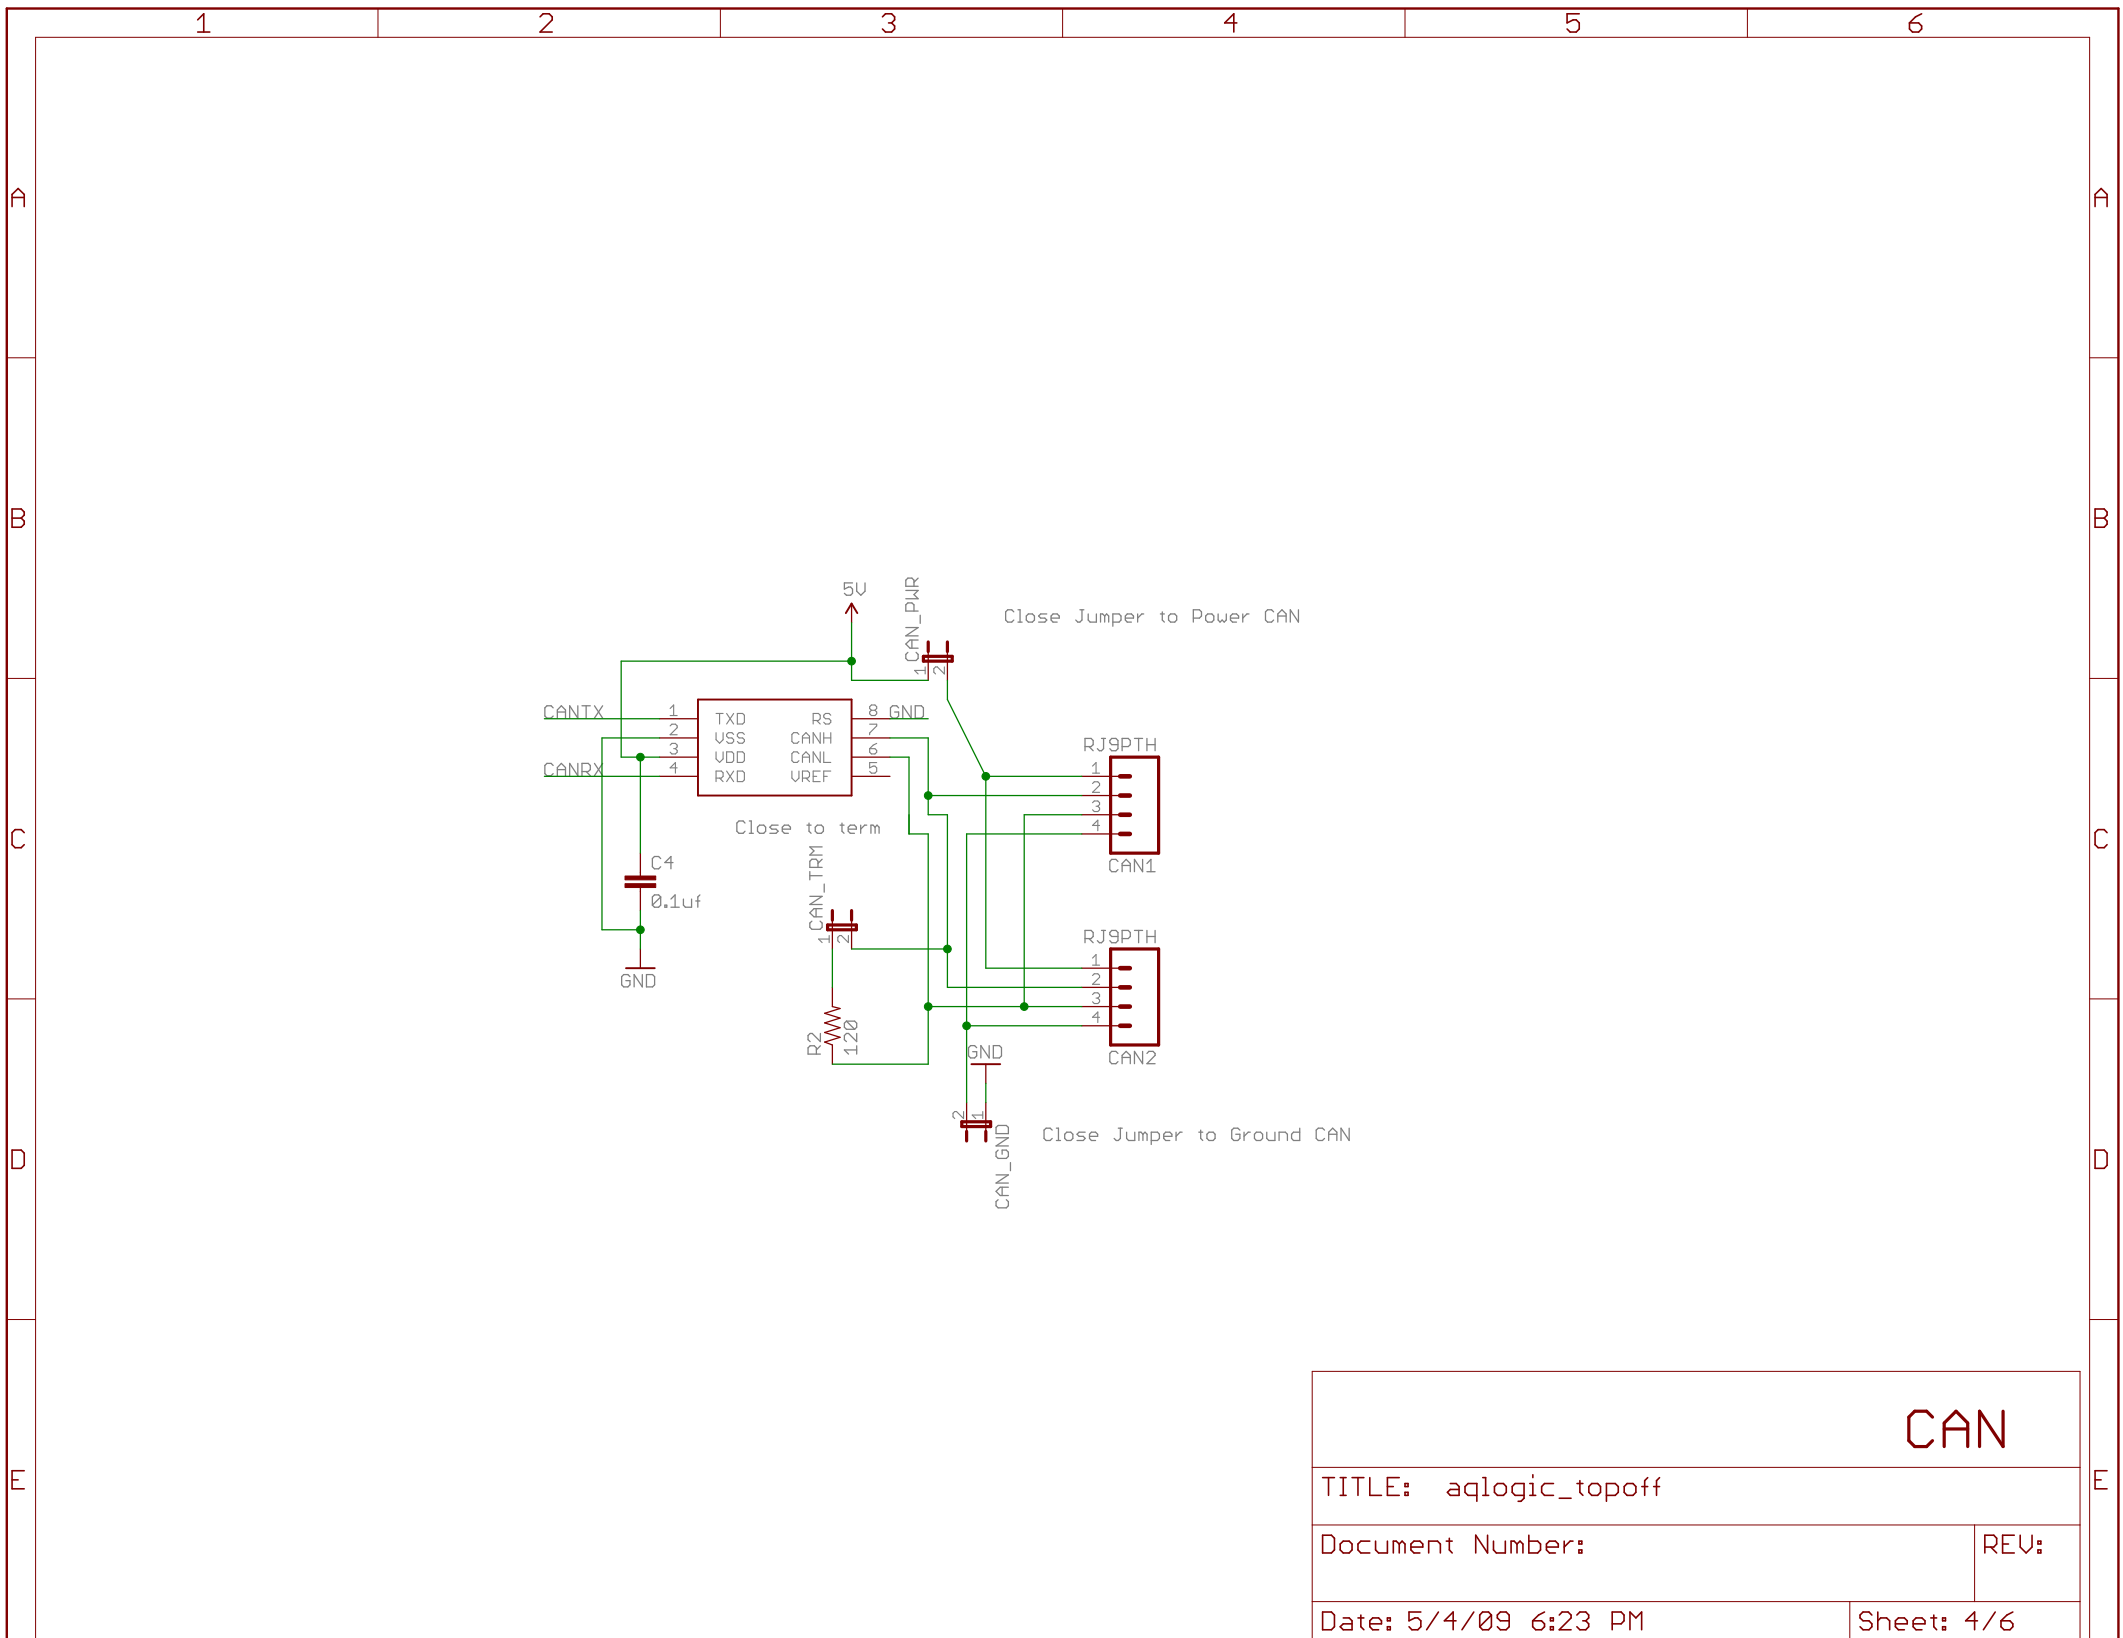

CAN

TITLE: aqlogic_topoff	
Document Number:	REV:
Date: 5/4/09 6:23 PM	Sheet: 4/6

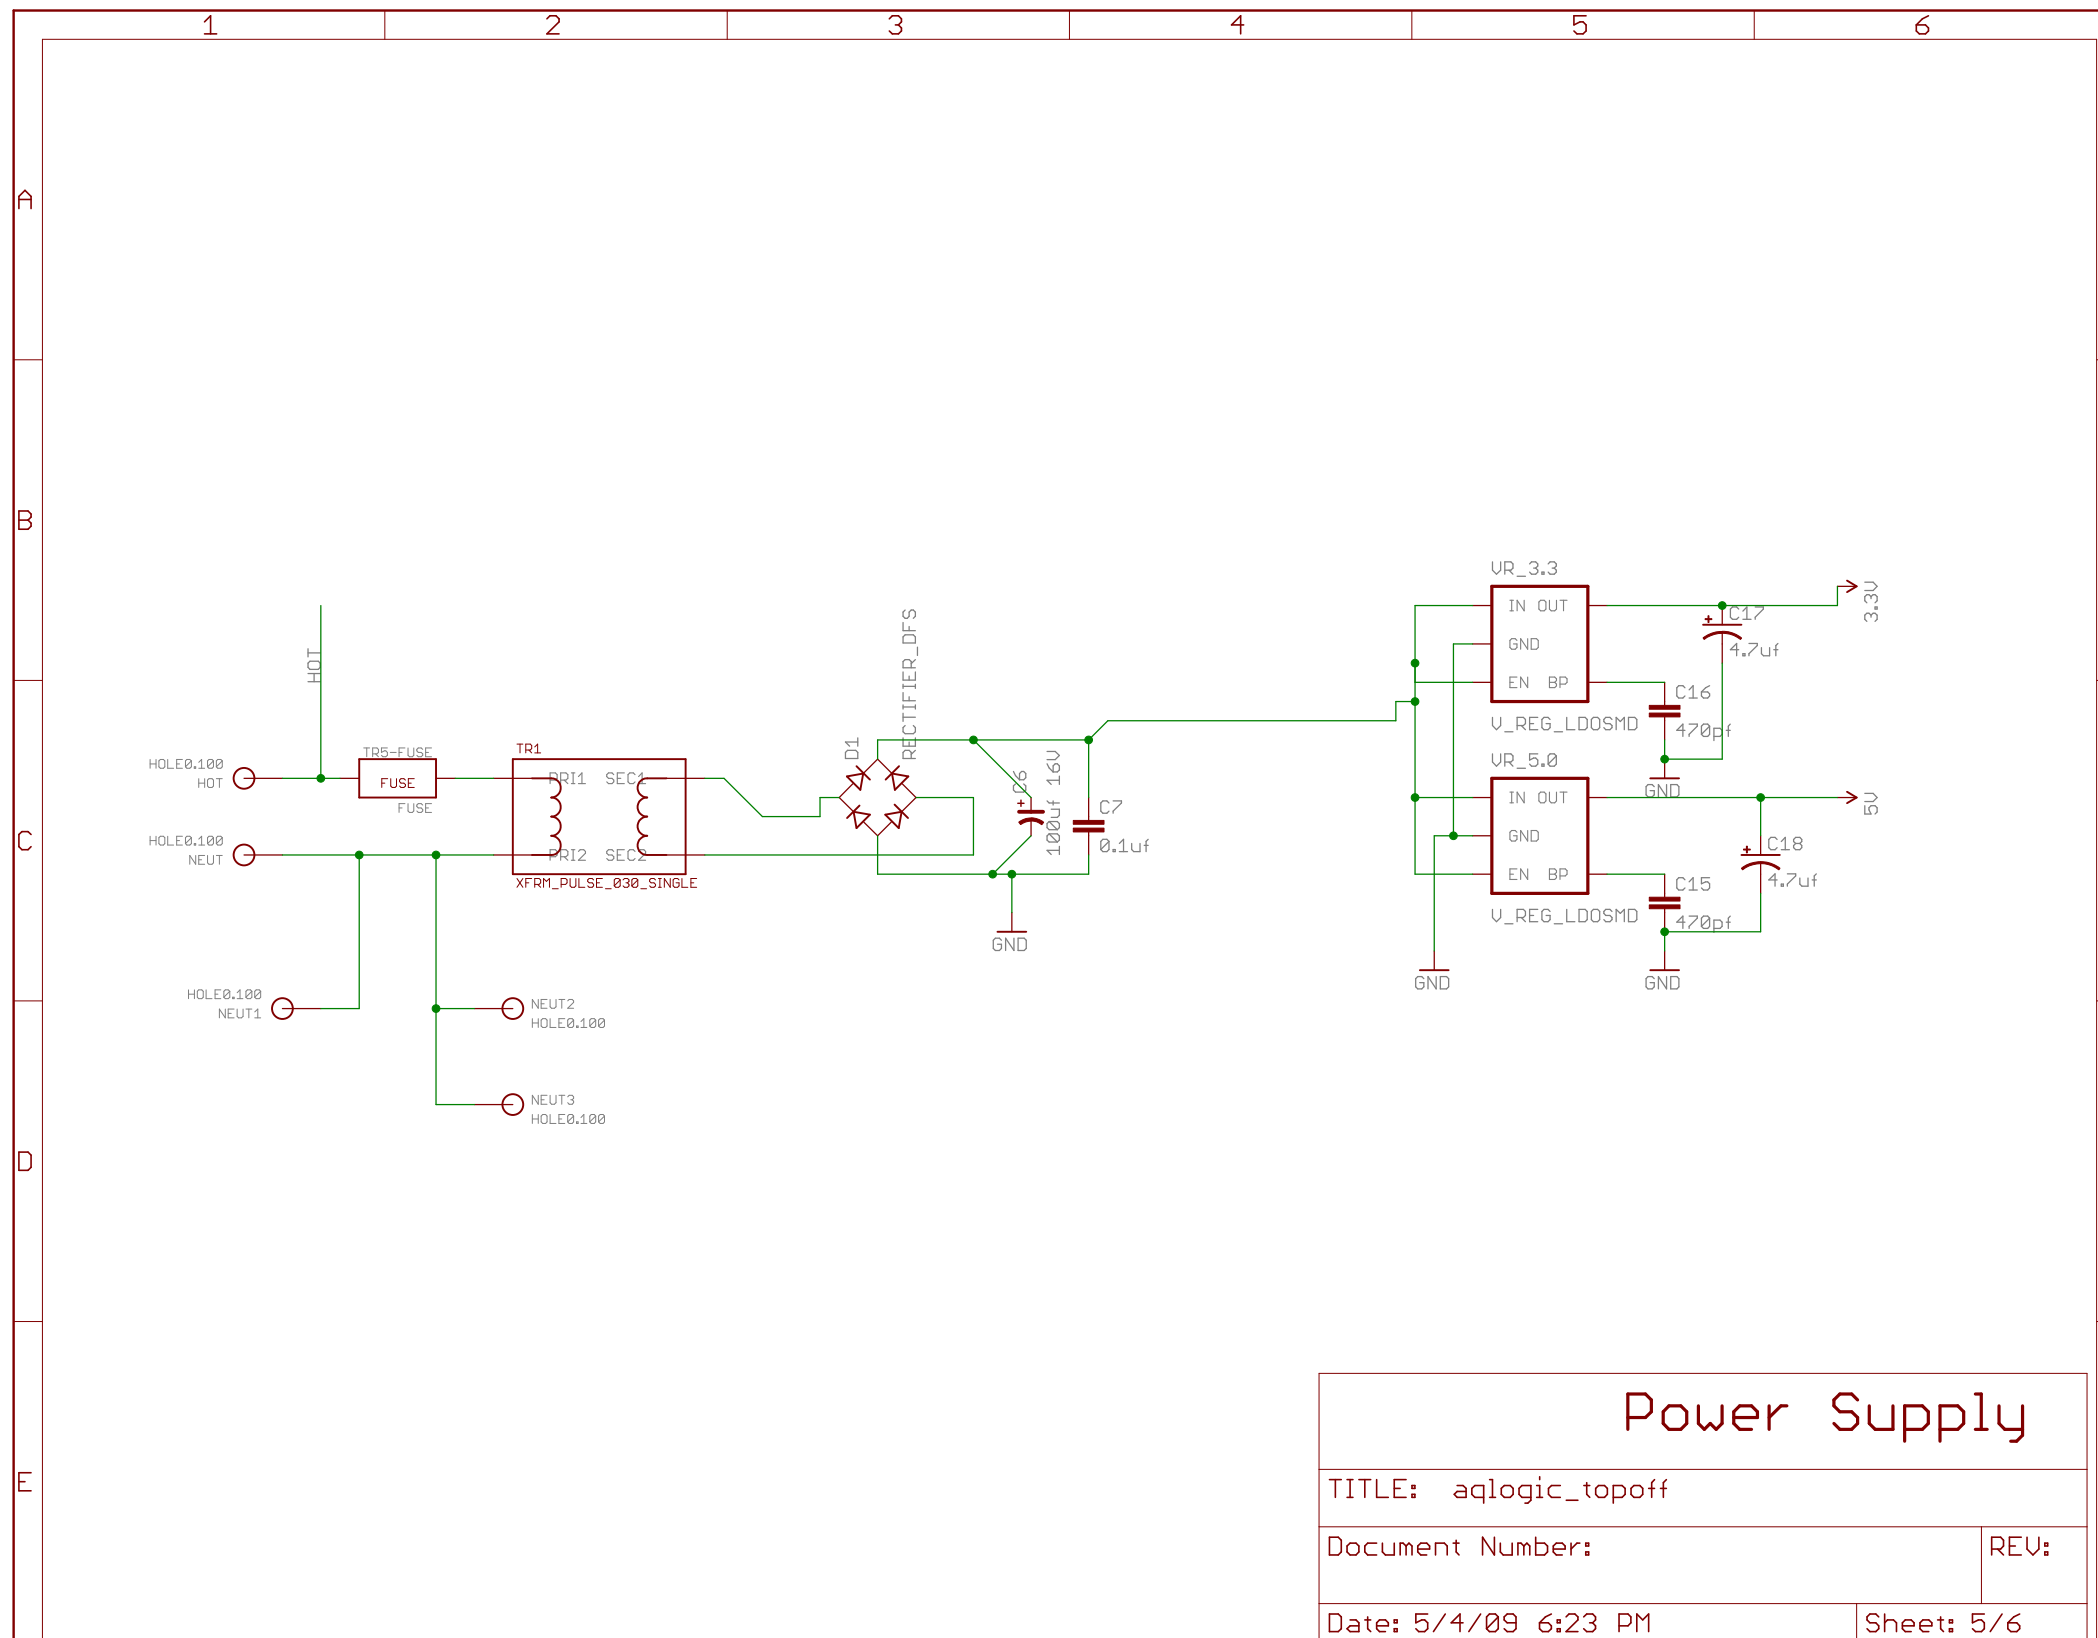

Power Supply

TITLE: aqlogic_topoff



Document Number:

REV:

Date: 5/4/09 6:23 PM





Sheet: 5/6

Sensor pulldowns
Digital input is 5V tolerant




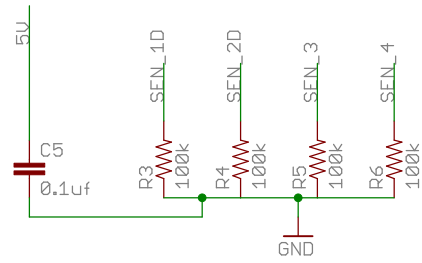


Designed for 10K Thermistor
Connect thermistor between 5V and SEN_1/2

Board holes



RJ11 Sensor Connectors



IO Connectors

TITLE: aqlogic_topoff

Document Number:

REV:

Date: 5/4/09 6:23 PM

Sheet: 6/6